

CXSW 系列 双缸气缸

Series Twin-rods cylinder




产品特点 Features

- | | |
|-----------------------|---|
| 1. 最大容许负载比CXSW系列大2-3倍 | 1. Maximum allowable load 2-3 times larger than CXS |
| 2. 双气缸设计, 2倍输出力 | 2. Double cylinder design, 2 times the output force |
| 3. 不回转精度高 | 3. High precision of no turning |
| 4. 侧面负载抵抗力强 | 4. Side load resistance better |
| 5. 标准带行程调整装置: 0~10mm | 5. Standard with stroke adjustment device: 0~10mm |

技术参数 Specification

缸径 (mm)/bore	6	10	15	20	25	32
工作介质/ Working medium	空气/air					
动作方式/ Acting tyle	双作用/ double acting					
最高使用压力/Max. operating pressure	0.7					
最低使用压力/Min. operating pressure	0.15			0.1		
环境和流体温度 /Environment and fluid temperature	-10~+60°C (但未冻结) /With out freezing conditions					
缓冲/ cushion	两端橡胶缓冲/damper(Both side)					
使用活塞速度mm/s piston speed	50~500					
结构 /Structure	双气缸 (2倍输出力) /twin rods (double force)					
*给油 /lubricate	不需要/ No					
行程调整范围 /Stroke adjustment range	0~10mm					
轴承/ bearing	滑动轴承/球轴承 slide/Ball bearing					
接管口径/pipe size	M5*0.8			Rc1/8		

型号注释 Order Code

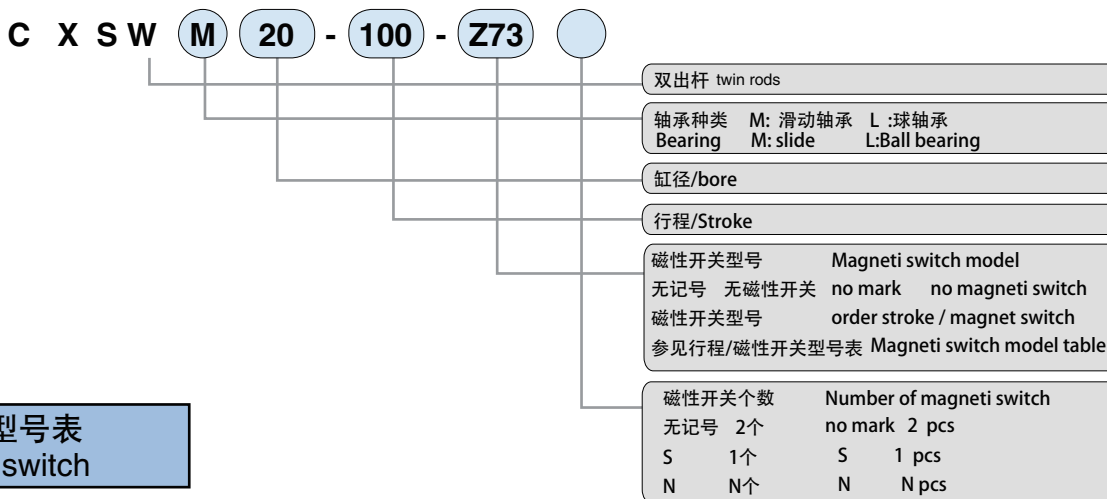

行程/磁性开关型号表 stroke / magnet switch

缸径(mm) /bore	标准行程**(mm) /standard stroke	长行程 (mm) Long stroke	*磁性开关型号 magnet sensor (轨道安装) (guider type)
6	10,20,30,40,50		Z73
10	10,20,30,40,50	75,100,125,150	
15	10,20,30,40,50		
20	10,20,30,40,50,75,100	125,150,175,200	
25			
32			

超过标准行程的场合, 在型号末尾追记 **-XB11, 请预定。*磁性开关规格及特性可参阅磁性开关系列。
导线长度表示记号: 无记号-0.5m, L-3m, z-5m 例: Z73, Z73L

* If you overtake the standard stroke, marked -xb11 at the end of the model, if you need please book.

* Magnetic switch specifications and characteristics can refer to the magnetic switch series. The wire length with mark, no sign -0.5m, L-3m, z-5m, for example: Z73, Z73L.